

AD 275

Motor : Doosan
Alternatör : Mecc Alte
Kontrol Sistemi : P 732

8 N9@A C H C F 'x N9@@? @9F

Üretici		Doosan		
Model		P126TI		
G]j]bX]f] Y' H U g U f i a		* G]j]bX]f] Z G i f U i' H] d		
Hava Emme		H i f v c' U F' Y' j Y' 5 f U' G c i h W' i		
Maksimum Standby Güç		1500 d/dk		
		272,00 kW [364,00HP]		
Toplam Silindir Hacmi	L	11,050		
Çap ve Strok	mm	123 x 155		
G i j h i f a U' C f U b i		17,0:1		
Norminal Devir	d/dk	1500		
Governör Tipi		Elektronik		
MU' ? U d U g] Y g]	L	23,00		
Su Kapasitesi	L	65,00		
Emilen Hava Debisi	m ³ /dk.	16,40		
Radyatör Hava Debisi	m ³ /dk.	295,00		
Egzoz Gaz Debisi	m ³ /dk.	43,00		
9[n c n' ; U n' G i W U_ i i	° C	560,00		
Elektrik Sistemi		24 V d.c.		
MU_ i h H' _ Y f i a]	Yük	%100	%75	%50
	L/sa	53,30	40,00	27,50

5@H9F B 5Hx F 'x N9@@? @9F

Üretici		Mecc Alte		
Modeli		ECO 38-1LN		
Frekans	Hz	50		
Güç	kVA	250,00		
H U g U f i a		: i f, U g i n z' (' i h d' i		
Cos fi		0,80		
: U n' G U n i g i		3		
Voltaj	V	400/230		
5_ i a	A	360,00		
MU' i h a ' G i b i Z		H		
ç i M _ g Y' a Y g]		H		
Stator		&#' U X i a		
Rotor		H Y_ ' M U H_ i' 9 g b Y_ ' 8] g_]		
_ U n' G] g Y' a]		Elektronik (AVR)		


6CM H j Y' 5 ₺ @?

5, i ; f i d	? i f i ' 5 i f i _ kg.	Boy mm.	En mm.	Yükseklik mm.	MU_ i h 8 Y d c ? U d U g] Y g] L
AD 275	2265,00	2950,00	1300,00	1588,00	450,00
Kabinli Grup	? i f i ' 5 i f i _ kg.	Boy mm.	En mm.	Yükseklik mm.	MU_ i h 8 Y d c ? U d U g] Y g] L
MS 60	2940	4000	1300	1970	450

AD 275

Motor : Doosan
Alternatör : Mecc Alte
Kontrol Sistemi : P 732

1 P 732 - Kontrol Sistemi

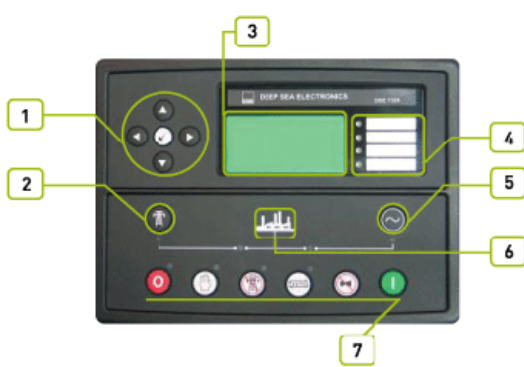

- 1 A Yb~ 'bUj][Ugnrcb 'Vi hcb'Ufi
- 2 YVY_Y'j Y'fUbgZf'Vi hcbi
- 3 @78 'jY'] 'Yha Y'Xi fi a 'Ufi'j Y'' , a Y' [" gYf[Y'Yf]
- 4 5finU'U'Ufa '@98fYf]
- 5 Jeneratör ve transfer butonu
- 6 Durum Led'leri
- 7 uU'i a U' 'Y_] 'gY, a Y Vi hcb'Ufi

2 Cihazlar

8G9ž'a cXY''+ ' &\$'C hca UH_ ' YVY_Y'5finU'jnYa Y'j Y'YbYfUht f'_cbhfc''a cX''
9'Y'_fcb]_U_'' Uf'V\Un'i
5VY'Xi fXi fa U'Vi hcbi 'j Y'_cbhfc''XYj fY'Yf] ,]b'g][cftU'Uf

3 Müdi'j Y'6cniU

7]\Un'Uf , Y]_gUWXUb]a U'YX]a] 'dUbc'_UV]b]bY'a cbHU'^ntüdi'if''Dübc'gUWZc'gZU'h_]a ntUgU'i']Y'_Ud'UbUfU'_gUW
m'nYmj'_cfcncnbU'X]fYb ,]\U'Y' [Y'h]f]f''Dc'mYghYfV]Y]_hcn'VcnU'j Y'Zf'ib'Ua U'] 'Ya]]Y'dUbc'_UV]b]bY'gcb'XYfYV'
XUnübi_'i'VcnU'ntüdi'if''?]]h]j Y'a Yb'Y Y']dUbc'_UdU 'i']Y'V\Un'UfU'i 'U a U'_c'UmXif''

4 Montaj

? cbhfc''dUbc'g]'YbYfUht f [fi Vi ' U'g]'' nYf]bXY_] 'gU 'Ua ; Y]_Unü'Uf'j YntU' [, ;]_i 'Y'Yfa]bU'a cX'''' nYf]bY
a cbHU'^ntüdi'if''
Dübcž'YbYfUht f [fi Vi bi b'ntü'buFUZbUZ [" n\]nUgi'gYj]nYg]bY nYfY 'h]f]f''

5 Jeneratör Kontrol Ünitesi

8G9'+ ' &\$

&&\$'_j 5 j Y'' nYf] 'YbYfUht f [fi d'Ufia 'nXU'8G9+' &\$'_cbhfc''g]gY'a]ghUbXUf'Xif''9'Y'_fcb]_j Y'Y'_fcb]_c'a Unü'b
[Un'j Y'X]nY'a c'ctcf' 'YbYfUht f [fi d'Uf'ib'ib'c'hca UH_'c'UfU_ , U'i h'ifa U'gi'j Y'Xi fXi fi 'a U'gi' ,]b'fUgUf'Uba 'i' h'if''
5nfiW'a cX'' YVY_Y'j c'fU'fbi'j Y'ZfY'_Ubg'ibi'jn'Yf'j Y'nYXY_'YbYfUht f [fi Vi]Y'cbU'VU 'i' [, 'fUbgZf'f'g]gY'a]b
_cbhfc''YXYf''

Standart Özellikler

A]_fc'] 'Ya W]Y'_cbhfc''ntüdi'a 'i' Xif
% &I '* ('d]_gY'ž@78 [" gYf[Y]Y'V' []Yf'_c'Um'i'_U'c_] bi f
A cX'''' b'dUbY']bXYb'j YntU'D7 j Y'ntü'ia 'i'j U'gi'fU'gimU'dfc[fUa 'Ua U
M a i U_ 'h' 'i' 'a Ya VfU'b'_Uj mY'j Y'VY 'h' 'i' 'a Yb~ 'bUj][Ugnrcb
9h.YfbYhj Y'F G&' &ž'F G(,) j U'gi'fU'gimU'i nU'_hUb']Y'h]a j Y'GA G]Y'fUdcf'U'a U
HUf] j Y'gUUh]Y'_UmihXYZfY]bXY'UfinU'c'Um'i'f] \$E[" gY'fa Y
uc_'i' fUf] \] Y'gUUh]Y'a c'ctcf'Y [nYfg]n'Xi fi a i] Y'VU_'ia 'dfc[fUa i
? cbhfc''h' 'Ufi. 'G'hdž'A Ubi Y'ž'c'hca UH_ž'HYghž'GHUfž'GYgg]n'#@Ua VU'fY'ghž
>YbYfUht fY'fUbgZf'ž' YVY_Y'mY'fUbgZf'ž'A Yb~ 'bUj][Ugnrcb
A c'ctcf'V'c_'gi m'i'gihW'_cbhfc''

AD 275

Motor : Doosan
Alternatör : Mecc Alte
Kontrol Sistemi : P 732

Ölçme Göstergeleri

A C H C F
A c h c f X Y j] f j
M J \ V U g i b W
G i ' g i W _ i i
u U i ' a U g U U j
5 _ j c ' U u †
A c h c f V U _ j a ' n U a U b i [Y ' a]
> 9 B 9 F 5 H x F
J c ' U > f @ & z @ B t
5 _ j a f @ & ! @ t
: f Y _ U b g
H c d f U _ _ U , U i
_ K
7 c g j
_ j 5 f
_ K \ z _ j 5 \ z _ j 5 f
: U n g i f U g i
9 6 9 ? 9
J c ' U > f @ & z @ B t
: f Y _ U b g

Koruma Devreleri

? 5 N
U f ^ U f i n U g i
8 ^ _ _ U _ j c ' U u †
G h c d ' U f i n U g i
8 ^ _ _ n U _ i h g Y j] n Y g j] f t d g t
_ K _ U i f i m _
H Y f g Z J n g i f U g i
< i n g Y b g ' f ' _ U n i d
x B ! 5 @ 5 F A @ 5 F
8 ^ _ _ n U \ V U g i b W
M _ g Y _ a c h c f g i W _ i i
8 ^ _ _ a c h c f g i W _ i i
8 ^ _ _ # M _ g Y _ a c h c f \ i n i
8 ^ _ _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i
8 ^ _ _ # M _ g Y _ Y b Y f U h f j c ' U u †
9 7 I _] U n
8 I F 8 I F A 5 ' 5 @ 5 F A @ 5 F =
G h f h U f i n U g i
5 W j g h c d
8 ^ _ _ n U \ V U g i b W
M _ g Y _ a c h c f g i W _ i i
8 ^ _ _ g i ' g Y j] n Y g j
8 ^ _ _ # M _ g Y _ a c h c f \ i n i
8 ^ _ _ # M _ g Y _ Y b Y f U h f Z Y _ U b g i
8 ^ _ _ # M _ g Y _ Y b Y f U h f j c ' U u †
M U \ V U g i b , U [i ' U n i W U , i _ X Y j f Y
: U n m b
9 @ 9 ? H F ? G 9 @ 5 u A 5
H c d f U _ _ U , U i
_ K _ U i f i m _
> Y b Y f U h f U i f i U _ j a
H Y f g Z J n g i f U g i

Opsiyon Özellikleri

M _ g Y _ n U ' g i W _ i i ! X i f X i f a U
8 ^ _ _ n U _ i h g Y j] n Y g j ! X i f X i f a U
8 ^ _ _ n U _ i h g Y j] n Y g j ! U U f a
M _ g Y _ n U _ i h g Y j] n Y g j ! U U f a
; 9 B @ 9 A 9 ' A C 8 y @ 9 F
' U j Y @ 9 8 ' a c X ' ' f &) (, t
; Y b] ' a f ' ' Y ' a c X ' ' f & %) + t
; Y b] ' Y a [] f] ' a c X ' ' f & % \$ t

Standartlar

9 Y Y _ h f] g Y ' ; _ j Y b] _ # 9 A 7 i n i b i _
6 G 9 B * \$ -) \$ 9 Y _ h f] _]] V \ U n ' U f i
6 G 9 B * % \$ \$! * ! & 9 A 7 ' a i U Z n Y h
6 G 9 B * % \$ \$! * ! (' 9 A 7 ' Y a] g n c b g h U b X U f i

9 Y _ h f c b] _ 5 _ ' U f ^ 7] U n i

5 _ ' U f ^ V \ U n i ' g k] h \] b [! a c X Y j Y ' G A 8 ' H Y _ b c ' c ' g]] Y ' ' f Y] a] X] f j Y ' m _ g Y _ j Y f] a Y ' g U \] d h f "
5 _ ' z j ! ' = _ U f U _ h Y f] g h _ Y f] g] b Y [' f Y ' U f ^ Y X]] f "
7] \ U n ; i _ i _ i g U X Y j f Y n Y _ U f i _ c f i b a i h f "
& (\$) ' U f ^ V \ U n i z '] b Y Y f ' U f ^ V \ U n ' U f i b U [' f Y X U \ U j Y f] a ' z i n i b " a ' f ' z U f i n U c f U b i ' X U \ U X ' ' _ z \ U Z j Y ' i g i n U m a U g i ' , c _
X ' ' _ h f
H Y f g _ j h d ' V U ' U b h g i b U _ U f i _ c f i b a i h f
' U f ^ U f i n U g i , i _ i ' a Y j W h i f "
;] f] j c ' U u † . % * ! & * (J "
u i _ ' U _ j a i . & + z ' j Y n U % z j) 5 "

